



SERVICE BULLETIN

from: TRIO-KENWOOD COMMUNICATIONS, INC.

TS-120S

#816

SUBJECT: TS-120S Band Pass Filter Change


DATE 2/7/80

For complaints of out-of-band interference, especially BCI, the BPF (bandpass filter) terminating resistors may be changed for an improvement of approximately 10dB.

On the RF unit X44-1260-01, change R3,5,7,9,11 from 1.5KOhm to 470 Ohm. No adjustments are required.

▼ RF UNIT (X44-1260-01)

PC BOARD VIEWS

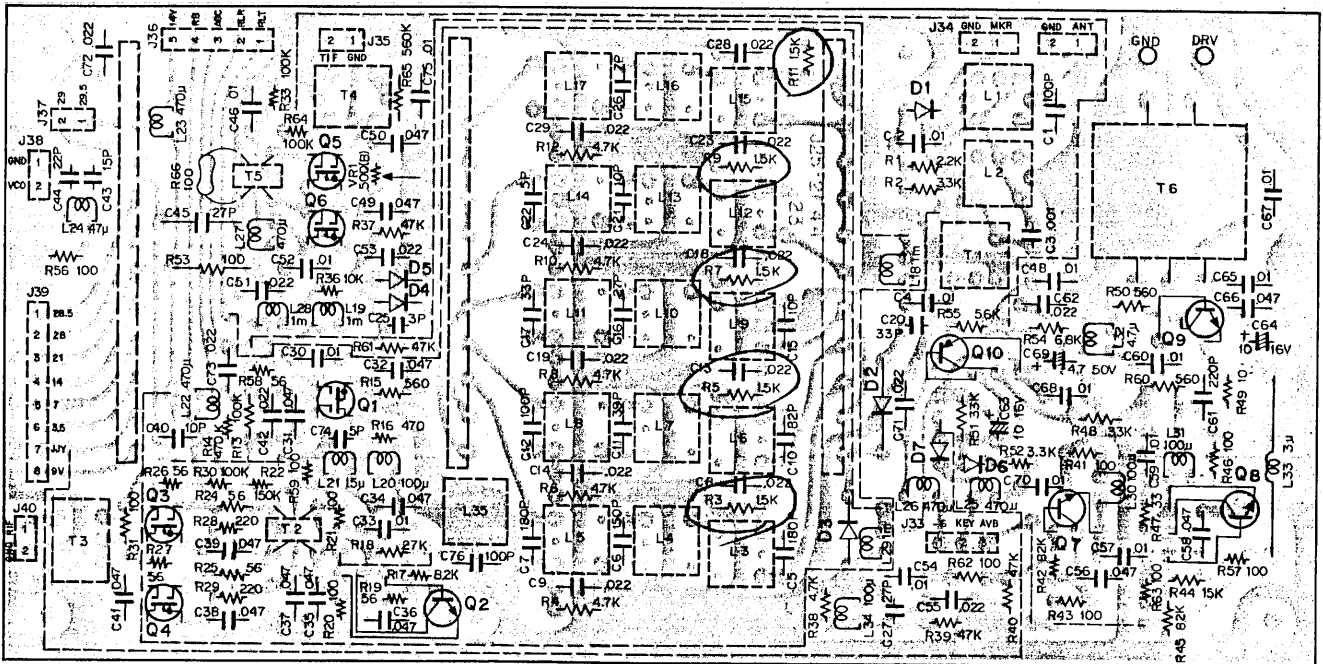

Q1,3~6: 3SK74(L), Q2,7,8: 2SC1815(Y), Q9: 2SC2086, Q10: 2SA1015(Y)
D1,3,5: 1S1587, D2,4: 1S2588, D6,7: 1S1555

JEB/yn