



SERVICE BULLETIN

from: TRIO-KENWOOD COMMUNICATIONS, INC.

59

SUBJECT: RM-76 Battery Back Up Power


DATE 12/14/79

To retain memory in the RM-76, an optional DC Cable and user-supplied battery may be used. This would be useful when transferring the unit Base to Mobile, or when operating on an AC supply which cannot be run continuously.

Connect a DC Cable assembly, E30-0220-05, as illustrated. This will connect at the RM-76 rear panel.

Battery recommendation is 7.5V DC.

Current drain is less than 50mA at memory on.

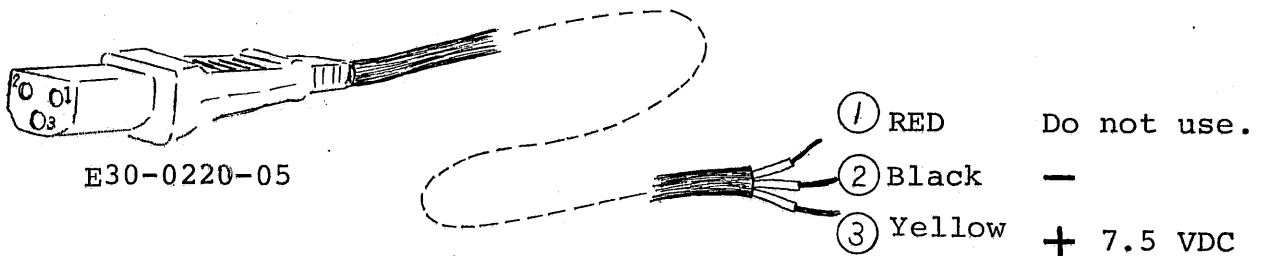

JEB/yn

