

# KENWOOD

ASB-987

## Service Bulletin



Amateur Radio

Division

<p><b>Subject: TH-205/215/315/415 PTT KNOB INSTALL PROCEDURE</b> <b>Date June 11,</b> <b>1990</b></p>
---------------------------------------------------------------------------------------------------------------

The original plastic knob (K29-3054-15) has been replaced with a rubber knob (K29-3054-35). The PTT mounting guide on the front panel must be removed to allow the new knob to be installed. The following procedure will explain the installation procedure.

1. Disconnect the battery pack and antenna.
2. Remove the four screws from the back panel.
3. Carefully lift the front panel up and lay it to the right side of the body of the transceiver.
4. Disconnect the front panel from the body of the transceiver.
5. The plastic PTT knob is held in place with three tabs. Press in the bottom tab and then push the knob out of the front panel.
6. Push in the guide to crease it's two legs where they join the front panel.
7. Wiggle the guide back and forth until it breaks off the front panel. Discard the guide and plastic knob.
8. Install the rubber knob on the front panel. The side with the square tab goes toward the bottom of the front panel.

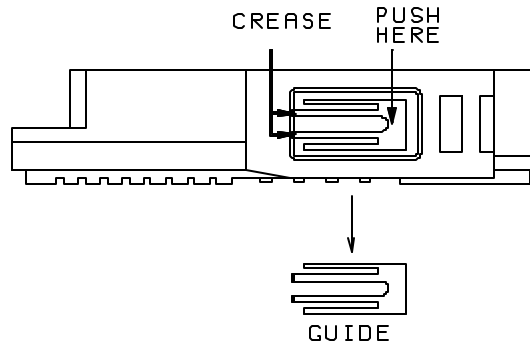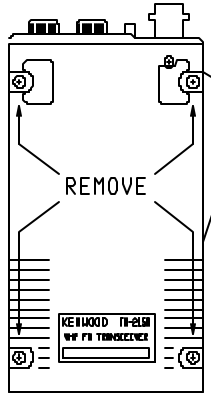

COPYRIGHT (C) 06/11/91 EWP FOR KENWOOD U.S.A. CORPORATION