

# SERVICE BULLETIN

from: TRIO-KENWOOD COMMUNICATIONS, INC.

VFO-120

#862

SUBJECT: VFO-120 Dial Lamp Switching Circuit


DATE 04/14/82

When operated with a TS-130 series transceiver, the dial lamp on the external VFO will remain on if the power supply remains on, even though the transceiver is off. Adding a transistor switch on the VFO-120 Switch unit X41-1240-00 will provide automatic lamp operation from the transceiver power switch.

On the Switch unit, add transistor Q1, 2SC1959(Y) (V03-1959-06) as a pilot light ground switch, controlled by the transceiver 9V DC line. Connect Q1 emitter to ground, collector to the pilot light ground (either the lead, or connector CJ-2, pin 2) and base through a 4.7k $\Omega$  resistor (R9) (RD14BB2E472J) to the 9V line.

- Note:
1. This change may be applied to units before serial number 110001.
  2. Installation time for this procedure is  $\frac{1}{2}$  hour or less.

## SWITCH UNIT (X41-1240-00)

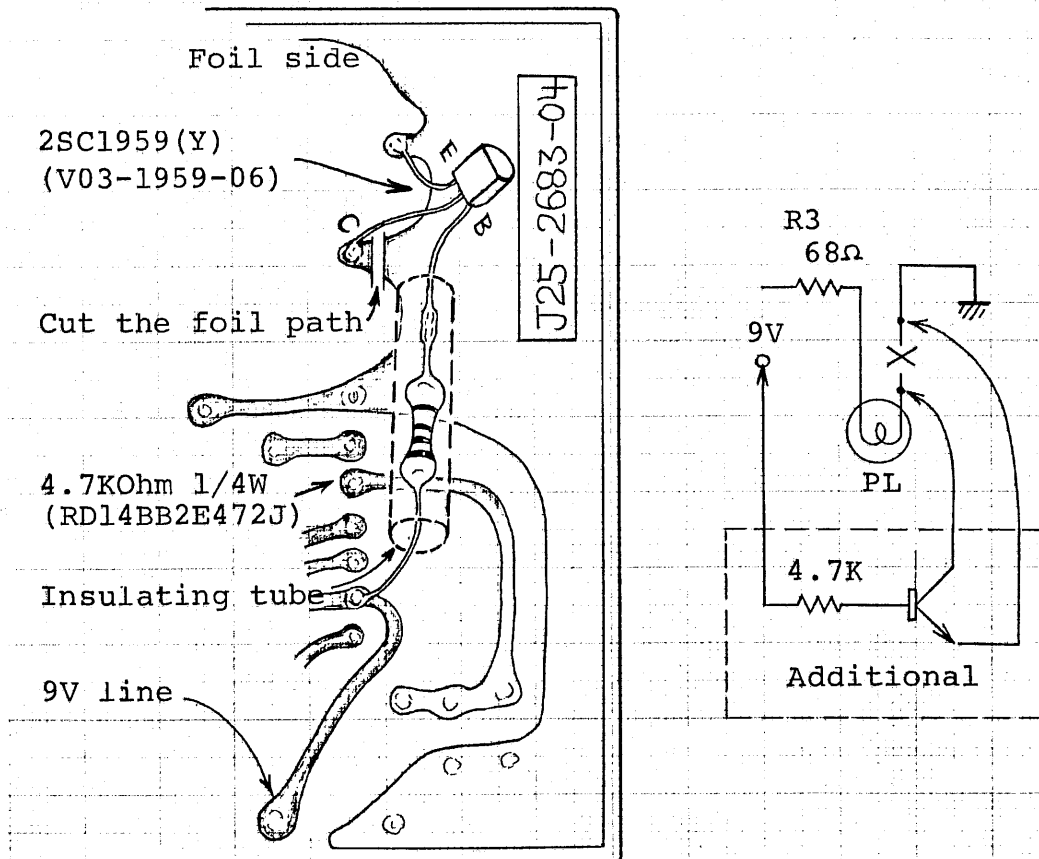

JEB/sh