


64-Bit MIPS RISC Microprocessor with Integrated L2 Cache

FEATURES

- Dual issue symmetric superscalar microprocessor with instruction prefetch optimized for system level price/performance
 - 533, 600 MHz operating frequency
 - >1080 Dhrystone 2.1 MIPS @ 600 MHz
- High-performance system interface
 - 1280 MB per second peak throughput
 - 200 MHz maximum frequency using HSTL signaling on the SysAD bus
 - Multiplexed address/data bus (SysAD) supports 1.5 V, 2.5 V, 3.3 V I/O logic
 - Processor clock multipliers 2, 2.5, 3, 3.5, 4, 4.5, 5, 6, 7, 8, 9
- Integrated primary and secondary caches
 - All are 4-way set associative with 32-byte line size
 - 16 KB instruction, 16 KB data, 256 KB on-chip secondary
 - Per line cache locking in primaries and secondary
- Fast Packet Cache™ increases system efficiency in networking applications
- Integrated external cache controller (up to 64 MB)
 - User-selectable EZ Cache protocol eliminates the need for external tag RAMs.
- High-performance floating-point unit - 1600 MFLOPS maximum
 - Single cycle repeat rate for common single-precision operations and some double-precision operations
 - Single cycle repeat rate for single-precision combined multiply-add operations
 - Two cycle repeat rate for double-precision multiply and double-precision combined multiply-add operations
- MIPS IV superset instruction set architecture
 - Data PREFETCH instruction allows the processor to overlap cache miss latency and instruction execution
 - Single-cycle floating-point multiply-add
- Integrated memory management unit
 - Fully associative joint TLB (shared by I and D translations)
 - 64/48 dual entries map 128/96 pages
 - Variable page size
- Embedded application enhancements
 - Specialized DSP integer Multiply-Accumulate instructions, (MAD/MADU) and three-operand multiply instruction (MUL)
 - I&D Test/Break-point (Watch) registers for emulation & debug
 - Performance counter for system and software tuning & debug
 - Fourteen fully prioritized vectored interrupts - 10 external, 2 internal, 2 software
- Fully static CMOS design with dynamic power down logic
- Pin compatible with RM5271, RM7000, RM7000A and RM7000B in 304-pin TBGA package, 31x31 mm

BLOCK DIAGRAM

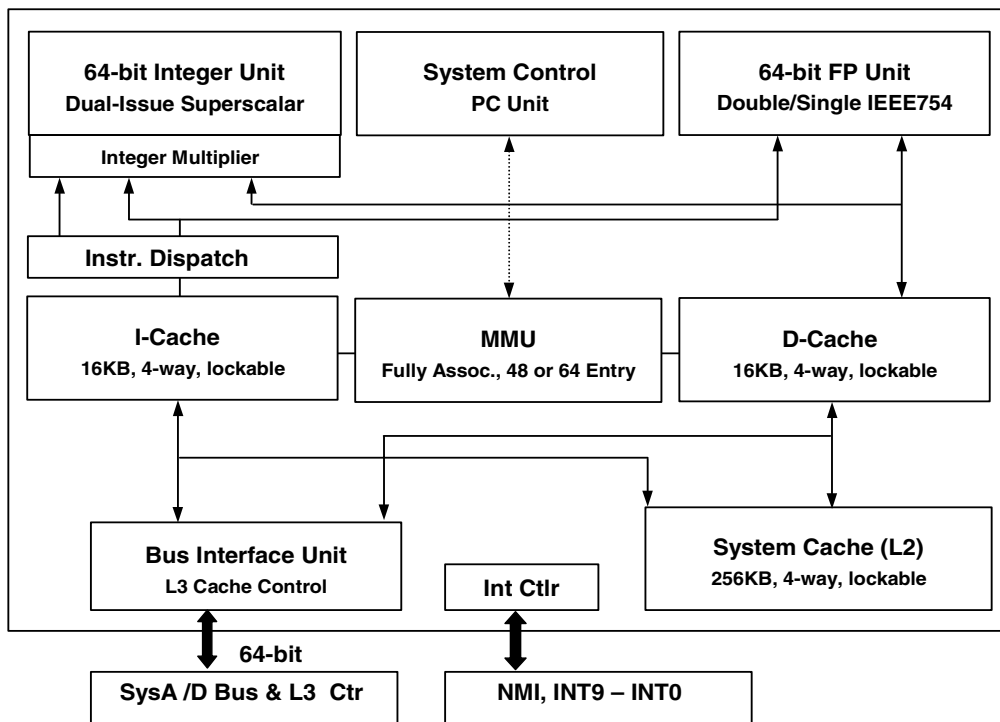

64-Bit MIPS RISC Microprocessor with Integrated L2 Cache

PACKAGING

- Fully Static 0.13µ CMOS design with dynamic power down logic
- 304 pin TBGA package, 31x31 mm

DEVELOPMENT TOOLS


- Operating Systems:
 - Linux by MontaVista and Red Hat
 - VxWorks by Wind River Systems
 - Nucleus by Accelerated Technology
 - Neutrino by QNX Software Systems
- Compiler Suites
 - Algorithmics
 - Green Hills Software

- Red Hat
- Evaluation Boards and Companion Chips
 - Marvell Technology
 - EV-64120A-7000: 32/64-bit, 33/66MHz PCI
 - EV-64240-7000: 32/64-bit, 33/66MHz PCI
 - Momentum Computer
 - Ocelot-C Compact PCI Development Platform
- Logic Analyzers and Emulation
 - HP
 - Tektronix
 - Corelis
 - Crescent Heart Software

APPLICATIONS

- Voice Gateways
- Multi-Service Access Platforms
- DSLAMs/Access Concentrators
- Remote Access Switches
- Web Switches
- Layer 3 Switches
- Backbone Switches/Routers
- RAIDs
- Set Top Boxes
- Networked Printers
- Cellular Base Stations

TYPICAL APPLICATION

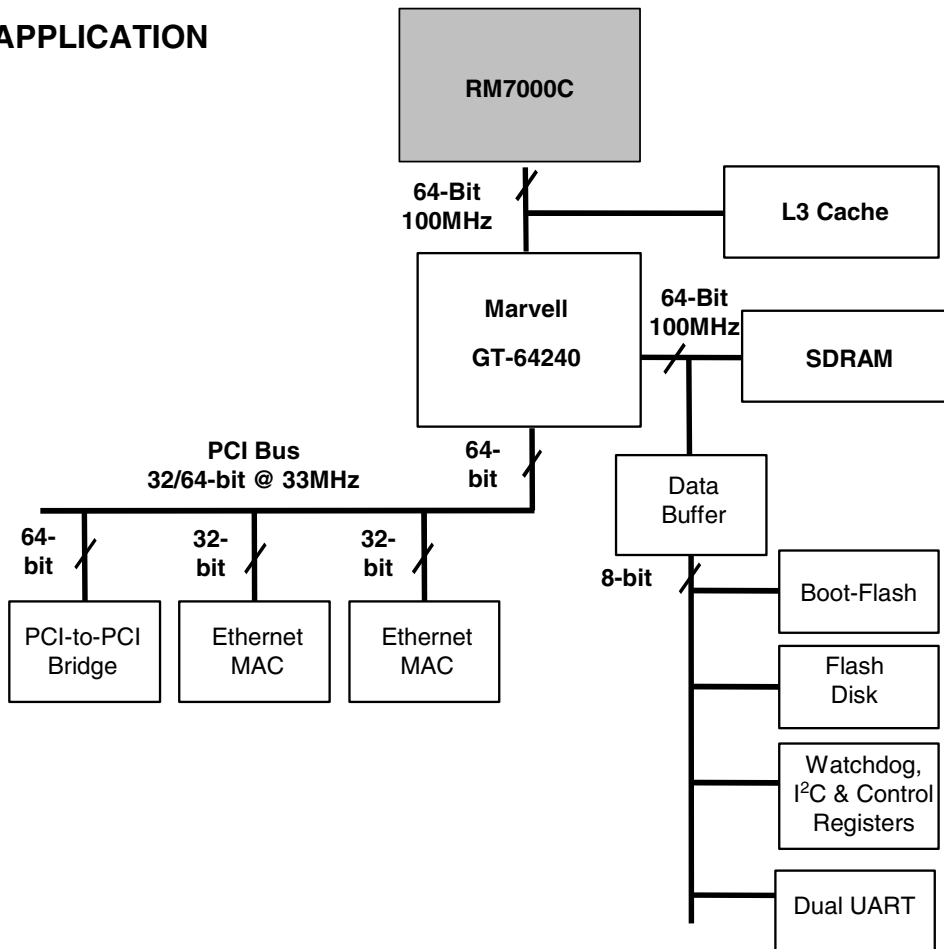

Head Office:
 PMC-Sierra, Inc.
 8555 Baxter Place
 Burnaby, B.C. V5A 4V7
 Canada
 Tel: 604.415.6000
 Fax: 604.415.6200

To order documentation,
 send email to:
document@pmc-sierra.com
 or contact the head office,
 Attn: Document Coordinator

All product documentation is available
 on our web site at:
<http://www.pmc-sierra.com>
 For corporate information,
 send email to:
info@pmc-sierra.com

PMC- 2011604 (R3)
 © Copyright PMC-Sierra, Inc. 2002. All
 rights reserved. RM7000C is a trademark of
 PMC-Sierra Inc.

Find price and stock options from leading distributors for RM7000C-600R on Findchips.com:

<https://findchips.com/search/RM7000C-600R>

Find CAD models and details for this part:

<https://findchips.com/detail/rm7000c-600r/Microsemi-Storage-OTN-and-Networking-Solutions>